

DATA SHEET


P/N: THZLNA-03NB S/N: 25112301/02

Parameters	Specifications
Frequency	250-300 GHz
Gain	20 dB typical
Noise Figure	10 dB typical
Psat	-3 dBm typical
Waveguide I/O	WR3.4 ; UG387/U-M
DC Voltage	5 V
DC Current	60 mA typical


1. Absolute Maximum Ratings:

- DC Voltage : 7 V
- **RF input : -10 dBm max**
- Baseplate Temperature: 45 °C
- **DO NOT OPERATE WITHOUT APPROPRIATE COOLING**
- **DO NOT EXCEED RF and DC Input Power Maximum**
- Caution: ESD sensitive! Anti-static precautions at all times during use


2. Test Data : Gain & Noise Figure S/N 25112301

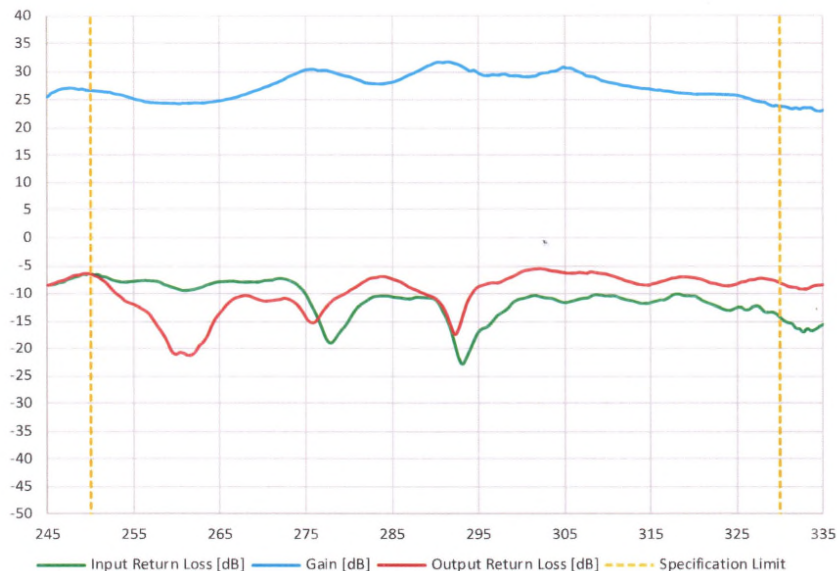

3rd Floor, 81 Rue de France
Nice 06000 France
Tel: +33 (0)7 87 52 52 56
Fax: + 33 (0)4 89 41 03 11
sales@vivatechthz.com

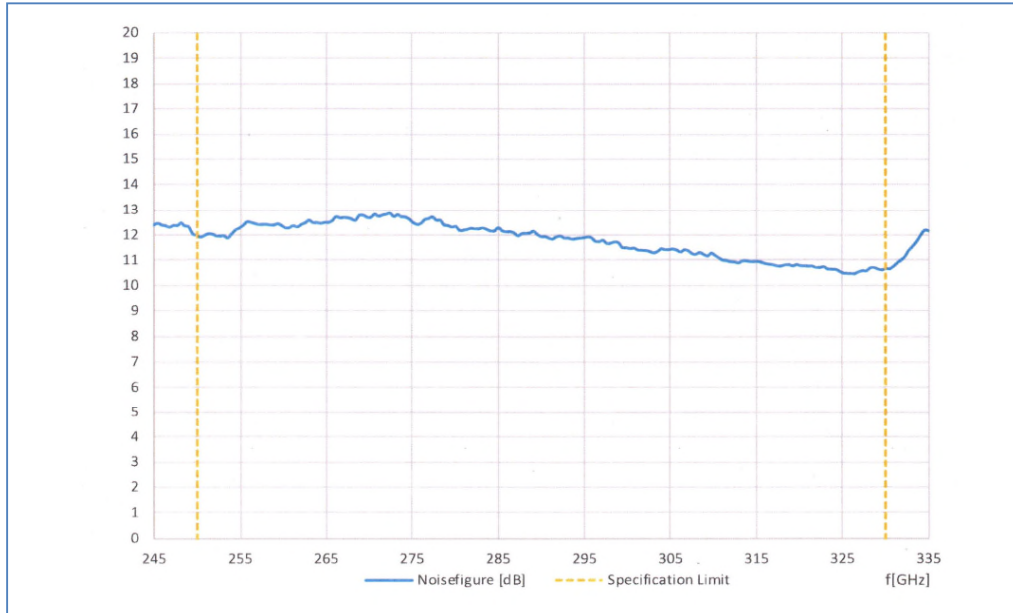

3. Test Data : Gain S/N 25112302

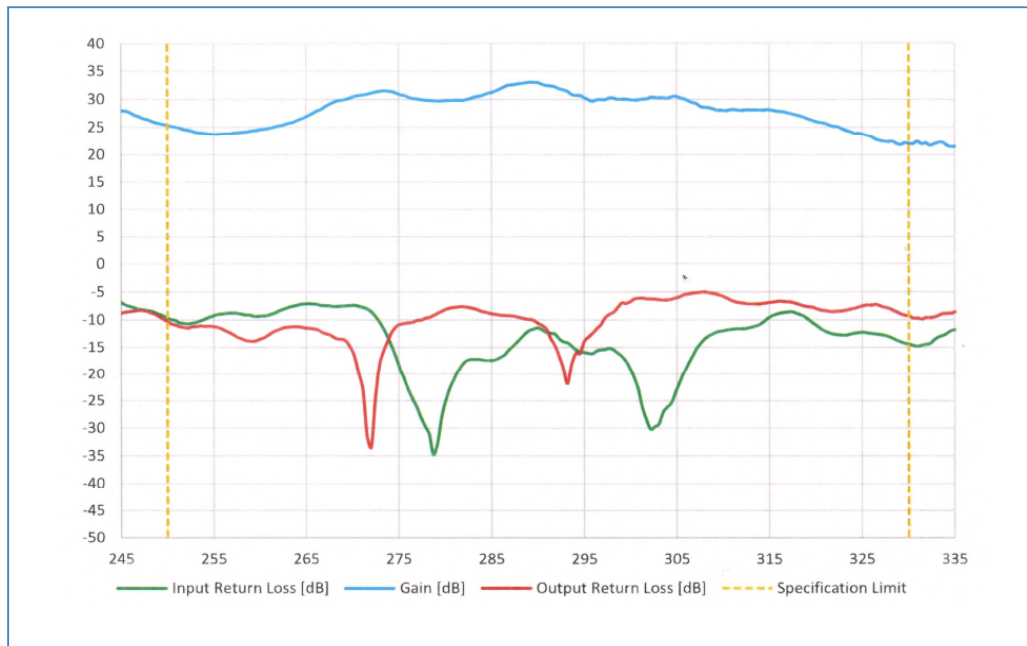

3rd Floor, 81 Rue de France
Nice 06000 France
Tel: +33 (0)7 87 52 52 56
Fax: + 33 (0)4 89 41 03 11
sales@vivatechthz.com

3.contd Test Data : Noise Figure S/N 25112302

